MAX4 series LED, Regress Lens Lay-In 9/16" Slot Grid



INSTALLATION PROCEDURE, CONTINUOUSLY ROWED (Sheet 1 of 3)


DO NOT DISCARD


PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.

Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.

Before Beginning Installation, Locate The Following Components. Gather Required Tools.

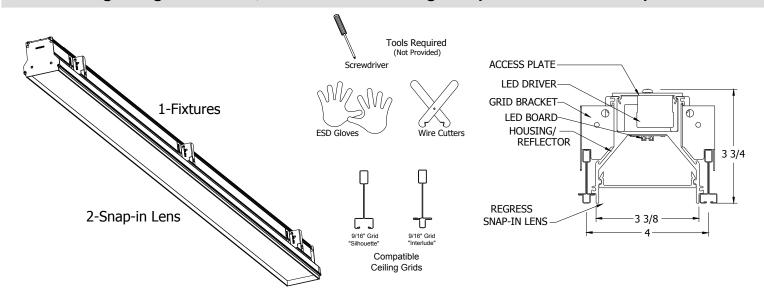

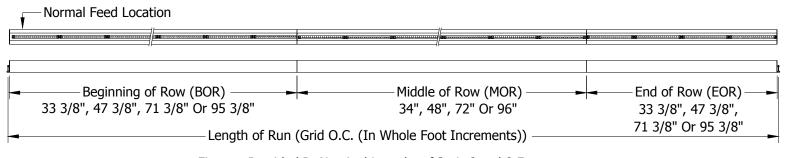

Fixtures Provided In Nominal Lengths of 3, 4, 6 and 8 Feet. (Depending upon Job-Site Capacity, Fixtures Can Be Provided In Longer, One Piece Lengths (Consult Factory))

*Note: Install in accordance with approved client drawing(s).

Beginning of Row (BOR)

Middle of Row(s) (MOR)

INSTALLATION DIRECTION

End of Row (EOR)

Service Hotline: 1-201-246-8188 Monday through Friday 9:00AM -5:00PM

MAX4 series LED, Regress Lens Lay-In 9/16" Slot Grid

INSTALLATION PROCEDURE, CONTINUOUSLY ROWED

(Sheet 2 of 3)




DO NOT DISCARD PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.


Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.


To Begin Installation:

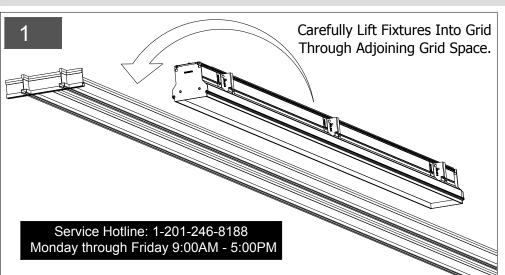



POWER OFF





Align Spicing Plates (Both Sides).















MAX4 series LED, Regress Lens Lay-In 9/16" Slot Grid

INSTALLATION PROCEDURE, CONTINUOUSLY ROWED (Sheet 3 of 3)



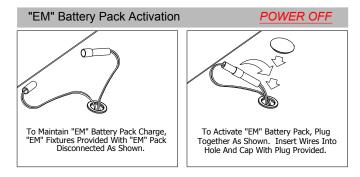

Service Hotline: 1-201-246-8188 Monday through Friday 9:00AM -5:00PM

Installation and maintenance of the MAX4 luminaire may only be performed by qualified and licensed electricians in accordance with all applicable codes and standards.

Picasso Lighting Indstries, LLC assumes no responsibility or liability for any unauthorized changes or modifications to the MAX4 luminaire.

The MAX4 luminaire is not intended for outdoor use.

Picasso Lighting Industries, LLC. shall assume no responsibility or liability for the integrity of the mounting surface and structure as well as the integrity of all components not provided by Picasso Lighting Industries, LLC.

Turn off line voltage and allow luminaire to completely cool before performing any maintenance including routine cleaning of luminaire.

Avoid touching LED light emitting surfaces while installing, replacing or providing maintenance to the luminaire.

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%.

Color temperature (k) is subject to a tolerance of +/- 150k from the nominal value.

Any component contained is this luminaire can only be replaced by the manufacturer or an agent thereof.

Keep these INSTALLATION INSTRUCTIONS in a secure and readily accessible place for any future maintenance or for reference.

DO NOT DISCARD PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.