

INSTALLATION PROCEDURE (Sheet 1 of 4)



DO NOT DISCARD

PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.

Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.

Before Beginning Installation, Locate the Following (4) Components, Gather Required Tools:

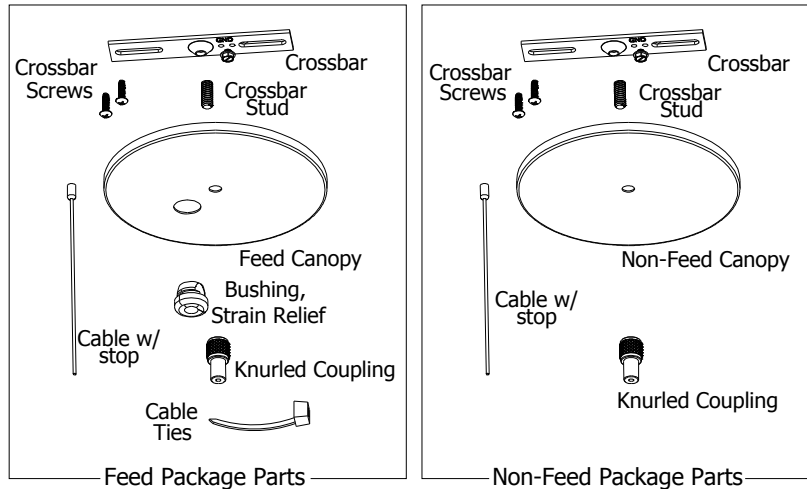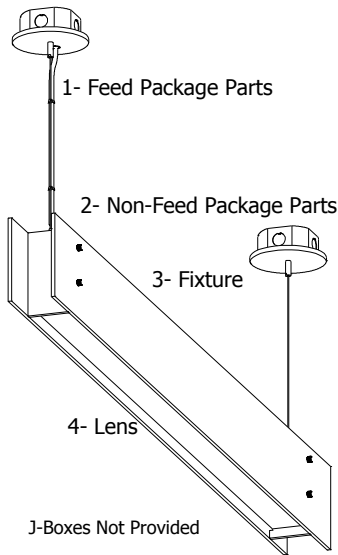


(2) Persons Required to Complete Installation.




To Begin Installation, Locate Feed and Non-Feed Suspension Points:

Note: Locate suspension points in accordance with approved client drawing.

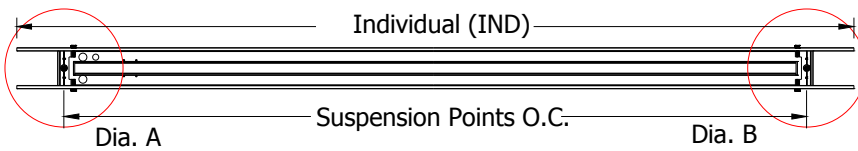


Fixtures shipped with power cord installed. Power cords are (5) or (6) wire per job requirements.


DIA. A Power Feed

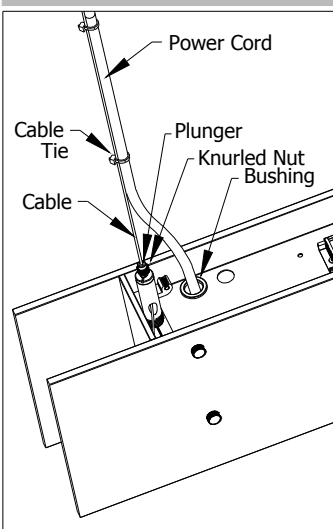

DIA. B Non-Power Feed

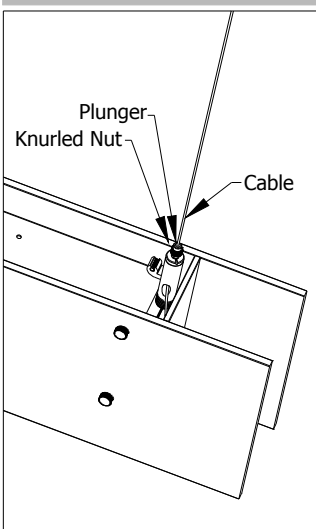

See Sheets 2 and 3 for Step-By-Step Installation Details

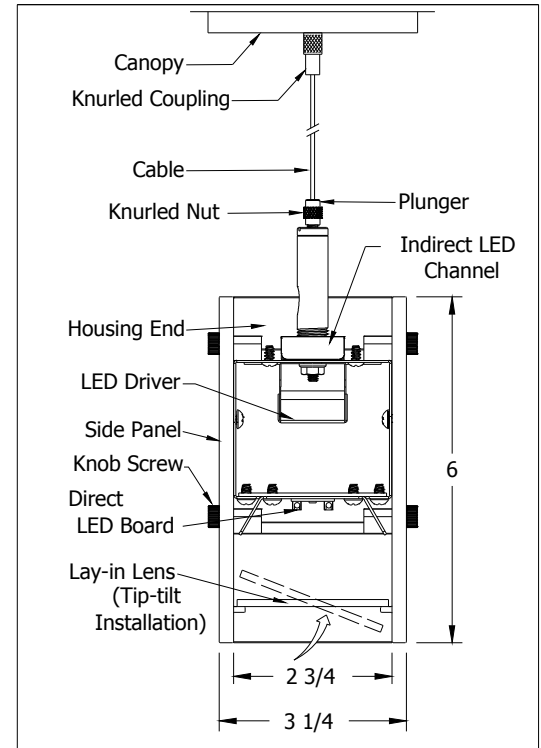







**Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM**

INSTALLATION PROCEDURE (Sheet 2 of 4)

Feed Suspension Assemblies @ Ceiling






POWER OFF

Dia. A

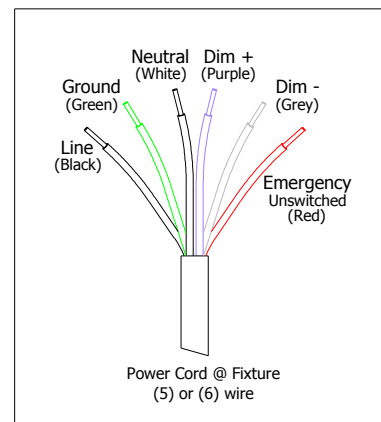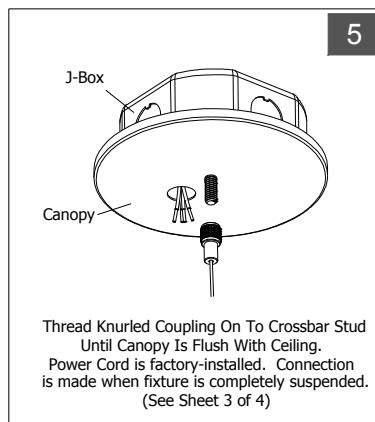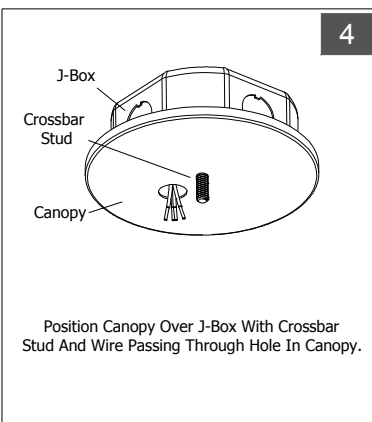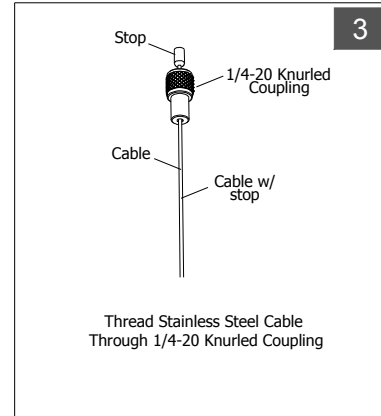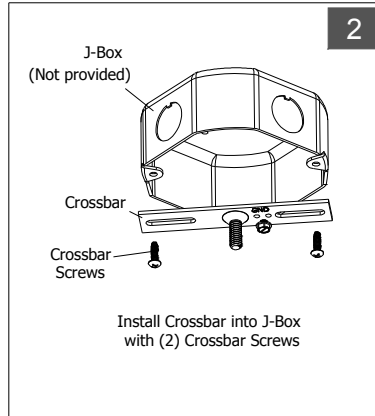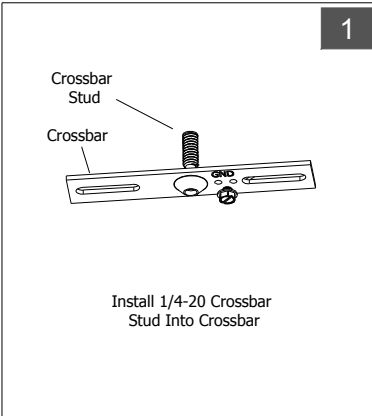

Non-Feed Suspension Assemblies @ Ceiling

Dia. B

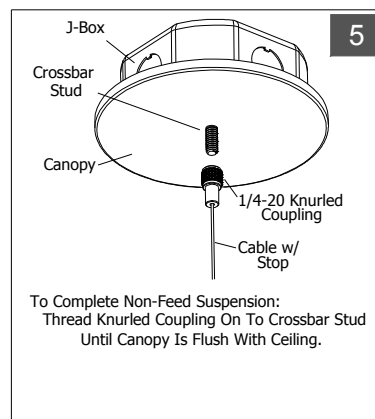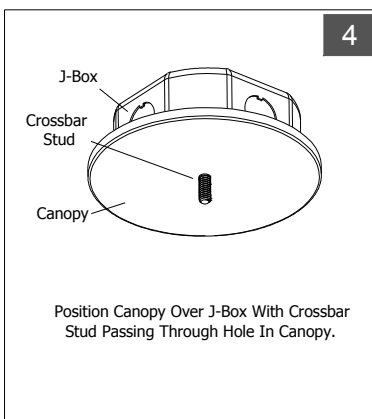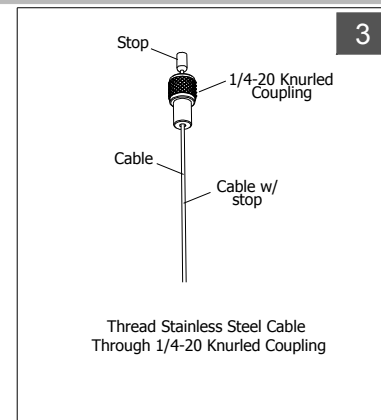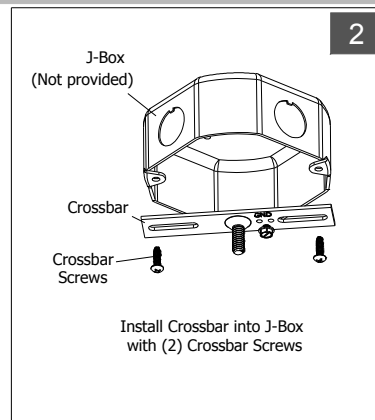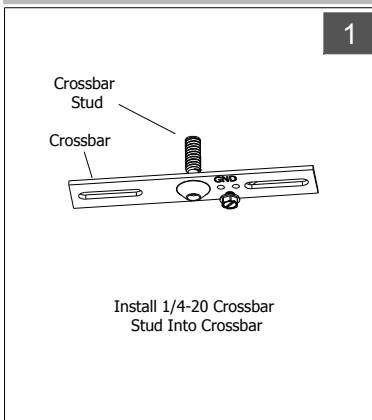

Fixtures must be installed by licensed electricians in accordance with all local and national codes.







**Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM**

INSTALLATION PROCEDURE (Sheet 3 of 4)

Feed Suspension Assemblies @ Fixture

POWER OFF




Dia. A and B

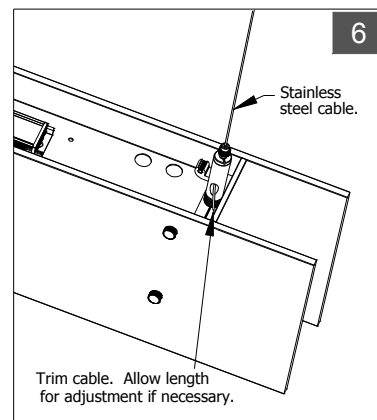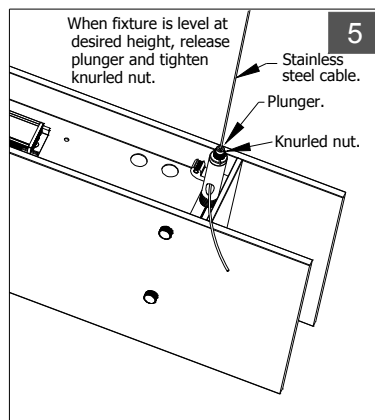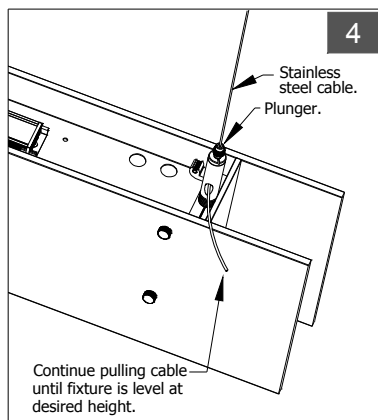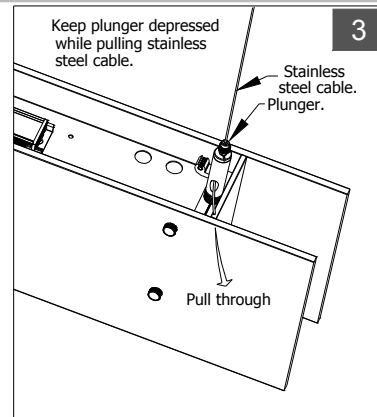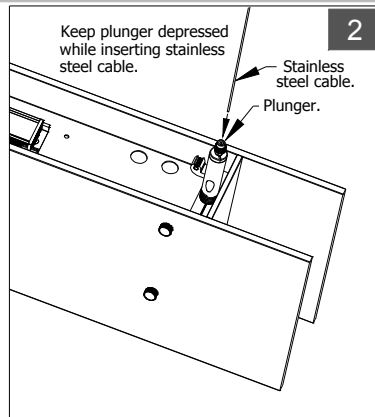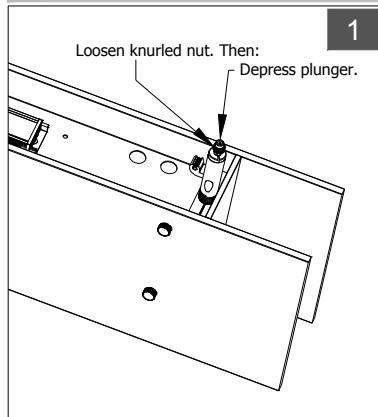

Completing Feed @ J-Box



POWER OFF

Dia. A

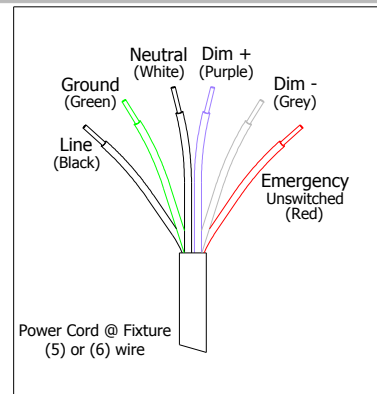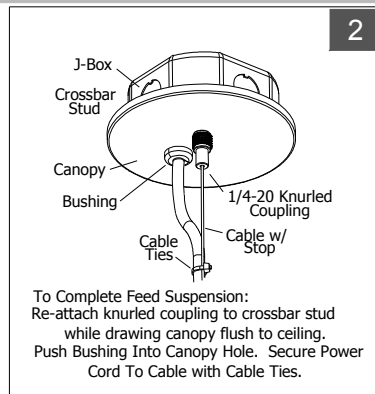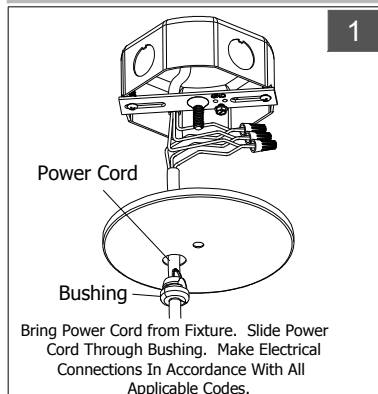

Optional Non-Feed Suspension Methods

POWER OFF

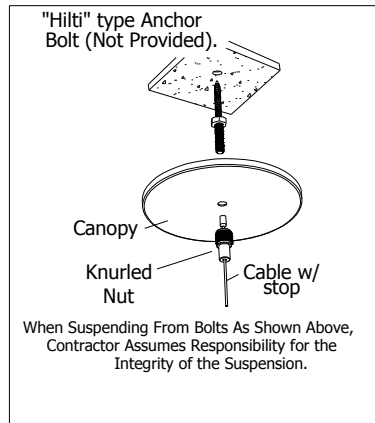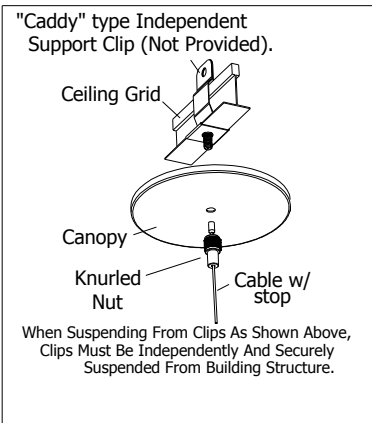


Fixtures must be installed by licensed electricians in accordance with all local and national codes.


**Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM**



INSTALLATION PROCEDURE (Sheet 4 of 4)

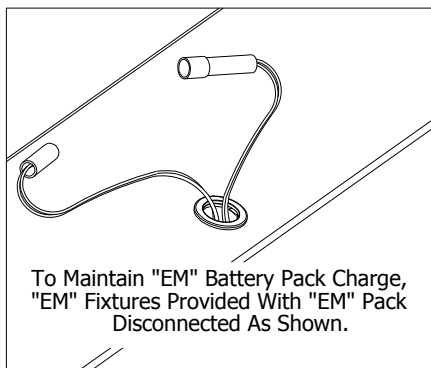"EM" Battery Pack Activation**POWER OFF**

To Maintain "EM" Battery Pack Charge,
"EM" Fixtures Provided With "EM" Pack
Disconnected As Shown.

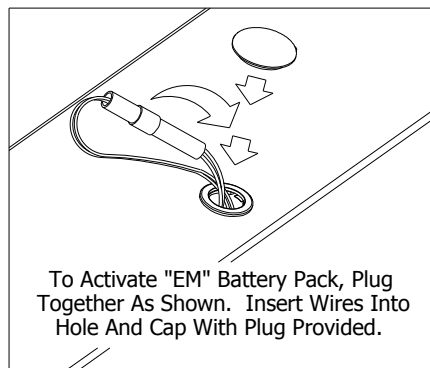

To Activate "EM" Battery Pack, Plug
Together As Shown. Insert Wires Into
Hole And Cap With Plug Provided.

Installation and maintenance of the TRUSS luminaire may only be performed by qualified and licensed electricians in accordance with all applicable codes and standards.

Picasso Lighting Industries, LLC assumes no responsibility or liability for any unauthorized changes or modifications to the TRUSS luminaire.

The TRUSS luminaire is not intended for outdoor use.

Picasso Lighting Industries, LLC. shall assume no responsibility or liability for the integrity of the mounting surface and structure as well as the integrity of all components not provided by Picasso Lighting Industries, LLC.

Turn off line voltage and allow luminaire to completely cool before performing any maintenance including routine cleaning of luminaire.

Avoid touching LED light emitting surfaces while installing, replacing or providing maintenance to the luminaire.

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%.

Color temperature (k) is subject to a tolerance of +/- 150k from the nominal value.

Any component contained in this luminaire can only be replaced by the manufacturer or an agent thereof.

Keep these INSTALLATION INSTRUCTIONS in a secure and readily accessible place for any future maintenance or for reference.

Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM -
5:00PM

DO NOT DISCARD
PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.