

## Overview

- The aluminum frame, which minimizes light projection at the edge of the sign, comes with a side mounting bracket and perforated spackle backplate to cover the J-box for a clean looking installation. In addition to white, black, and silver, the sign can be specified in anodized, plated, woodgrain, and custom RAL-matched finishes—flexibility that permits better visual integration into the interior environment.
- Designed with architects, engineers, and lighting designers in mind
- Accompanying side bracket can be ordered in a different finish from the frame to create a floating effect
- All-aluminum extruded housing with high-grade acrylic face
- Removable front cover for easy installation
- Optional 6" or 8" lettering in red or green
- Field-removable arrows, allowing the same sign to indicate right, left, or dual directionality
- Dual Voltage 120v/277v AC with long-life LED illumination
- Easily accessible test switch and charge rate indicator
- UL 924, NEC, OSHA, and NYC approved
- Listed for damp locations
- Developed in collaboration with Gensler serving as product design consultant
- North America/Europe US Patent No. 10,867,534
- Choice of standard acrylic lens or premium laser cut acrylic lens which provides a more even, sharper illumination.
- Made to order in the USA



# Frame Out™ Flag

FRAMED EXIT SIGN

TYPE  
PROJECT

## Ordering Format

PART NUMBER: FOE-F

Fixture Finish	Mounting Style	Letter Size	LED/Letter Color	Acrylic Style
<b>SW</b> = Special pattern submitted by designer	<b>FR</b> = Flag Mount Wall on Right <b>FL</b> = Flag Mount Wall on Left	<b>6</b> = 6 inch <b>8</b> = 8 inch	<b>R</b> = Red EXIT / 4 direction arrows included <b>G</b> = Green EXIT / 4 direction arrows included	<b>FC1</b> = Clear - 1 side only <b>FM1</b> = Mylar Mirror - 1 side only <b>FM2</b> = Mylar Mirror - 2 side only

Frame Out Finish	Wall Bracket Finish	Battery	Voltage
<b>W</b> = White <b>BK</b> = Black <b>SVR</b> = Silver <b>RAL</b> = RAL Custom Color - enter RAL# in notes section <b>PA</b> = Plated Aluminum - enter plated finish in notes <b>CW</b> = Custom Wood Finish - see wood PN # enter in notes. <b>AA</b> = Anodized Aluminum - enter PN in notes section	<b>w</b> = White <b>BK</b> = Black <b>SVR</b> = Silver <b>RAL</b> = RAL Custom Color - enter RAL# in notes section <b>PA</b> = Plated Aluminum - enter plated finish in notes <b>CW</b> = Standard Wood Finish - see wood PN # enter in notes. <b>AA</b> = Anodized Aluminum - enter PN in notes section	<b>BB</b> = 4.8 Volt NiCad 90Min./24hr Charge	<b>V12</b> = Dual 120/277 Volt - AC 4 Watts

### NOTES

ORDER NUMBER:

# Frame Out™ Flag

## FRAMED EXIT SIGN

TYPE

PROJECT

### Construction & Mounting

#### HOUSING

Housing is constructed of all extruded aluminum. The front cover is removable for easy service.

#### MOUNTING

Side mount bracket is easy to install and comes with spackle flange for clean installation.

#### LABELING


UL Approved IBEW Union Made

#### OPTICS

The "Frame Out" flag incorporates a strip of long-lasting LEDs at the bottom of the housing to illuminate the sign evenly. LEDs are red or green to enhance the red or green exit sign and direction arrows.

#### FINISH

Standard powder-coated colors are white, black and silver. Custom processed wood finishes, aluminum anodized finishes, chrome/gold plating, and custom finishes are available as well. We also accept RAL and Pantone numbers for powder-coating color choices.

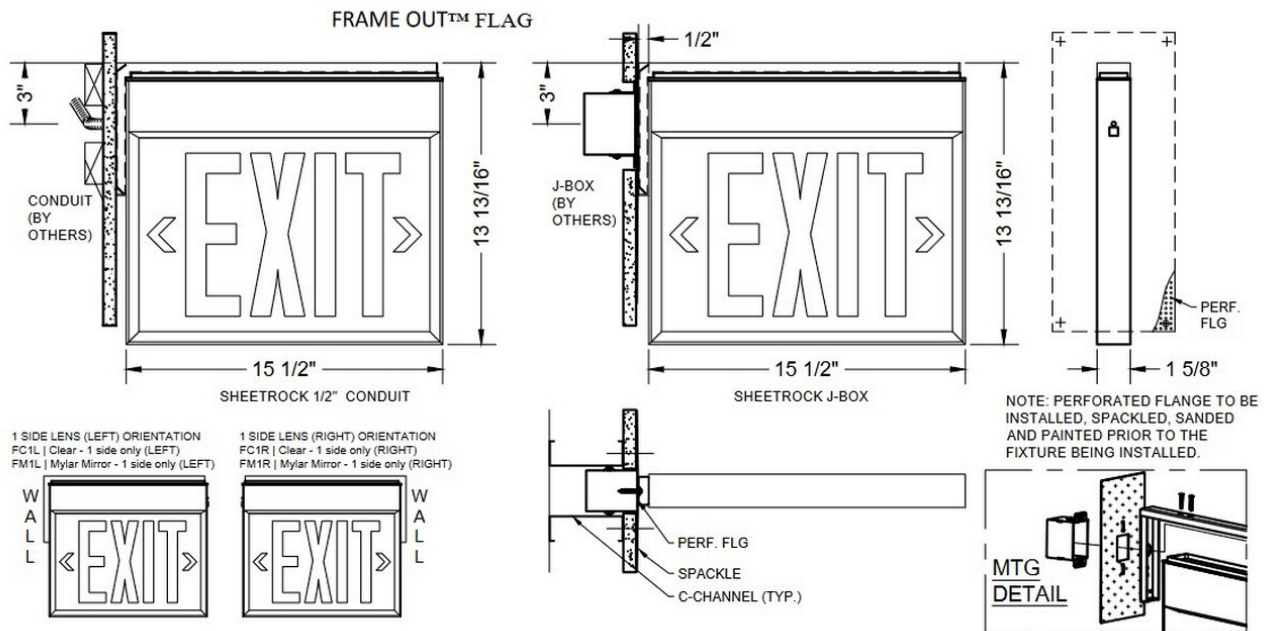


# Frame Out™ Flag

## FRAMED EXIT SIGN


TYPE

PROJECT


### Standard Finishes



White  
W




Black  
BK




Silver  
SVR

### Anodized Aluminum


xxxx-B for Aluminum to be Brushed




Anodized Black  
AABK




Anodized  
DK. Bronze  
AADB




Anodized  
LT. Bronze  
AALB



Anodized  
Champagne  
AALC




Anodized Clear  
AACL




**Custom RAL** - Custom finishes go to: [tiger-coatings.com](http://tiger-coatings.com) **Add # in Notes**

Standard Finishes – colors are powder coated and do not add to delivery lead time.  
 Anodized Aluminum – can be smooth or brushed, color can vary fixture to fixture and adds 2-3 weeks to lead time. Anodized finish is limited in fixture size.  
 Plated Aluminum – is a mirror finish in chrome and gold and adds 2 weeks to lead time.  
 Wood Finishes – so realistic, wood finish can add up to 3-4 weeks to lead time.


### Plated Aluminum




Antique  
Brass  
APAB



Aged  
Bronze  
APBZ




Polished  
Chrome  
APPC




Polished  
Gold  
APPG


### Wood Finishes




Light Bamboo  
LW01




Light Pine  
LW02




Teak  
LW03




Dark Bamboo  
LW04




Dark Cherry  
LW05




Brushed Chestnut  
LW06




Chestnut  
DW01




Dark Chestnut  
DW02




Cherry  
DW03




Dark Mahogany  
DW04




Mahogany  
DW05



Walnut Pine  
DW06



Dark Walnut Oak  
DW07



Consult Factory

## Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture applications to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC.
- UL 924 approved under emergency lighting and power equipment.
- EMR is a minimum of 90 minutes operation to meet code.
- Replace the battery with MYD battery PN AAA300, rated 300mah, 4.8v.
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC.
- The emergency battery is a recyclable Ni-Cad battery at 4.8V @ 300ma.
- Test switch and charge indicator.
- Suitable for damp location. Use in 10 celsius (min) to 40 celsius (max) ambient temperature.

## LED Performance

LED Output	CCT Color Temp	Watts	Lumens	Lumens per Watt	CCT Multiplier
Soft	Red	3.72 TW 120v	NA	NA	NA
Soft	Red	3.87 TW 277VAC	NA	NA	NA
Soft	Green	3.72 TW 120VAC	NA	NA	NA
Soft	Green	3.87 TW 277VAC	NA	NA	NA

- The table above is a quick reference.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Re-lamp LEDs with only factory lamp assembly.
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation.
- Light engines are easily replaced.

## Certifications & Warranties

- Limited five-year (50,000 hours) warranty on all products. Limited ten-year (100,000 hours) warranty on all Lutron drivers.
- DLC listed products will have DLC Logo.
- Chicago Plenum and IC products are available upon request.
- Warranty does not cover damage caused by transport, damage caused by using the fixture in an area it is not UL rated for, damage caused by negligence, lack of maintenance, attempts to repair by unqualified or unauthorized personnel, by using non-original accessories/parts, fixtures installed in systems without power surge protection.
- UL and CUL listed for dry and damp locations.
- IBEW USA Union All fixtures are IBEW manufactured and assembled in the USA.
- We manufacture based on approved spec sheets and submittals signed by professionals responsible. Change orders must be in writing and will delay delivery.
- Picasso Lighting must receive in writing any thought to be defective products discovered, no later than 4 weeks from delivery to; [ttoledo@picassoltg.com](mailto:ttoledo@picassoltg.com). Picasso Lighting will send a field technician to the site to evaluate the said defective product. We do accept field repair from licensed electrical contractors but not without a written agreement signed by Picasso Lighting official. Failure to adhere to all warranty and certifications will void any recompense and the warranty.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.