



PICASSO LIGHTING INDUSTRIES, LLC
320 West Commerical Ave., Moonachie, NJ 07074
201.246.8188

Indoor Distribution Test Report

Picasso Lighting Industries, LLC

320 West Commerical Ave.
Moonachie, NJ 07074

Photopia Photometric Analysis & Optical Design

Catalog Number

MUS-xR-4-D7-I10-30-80-FW-BW-W

MUSE - 4' Up/Downlight - White Housing, Frosted White Lens (Downlight), Bat Wing Lens
(Uplight)

Test Number

IES-P00373

Test Date

Fri Oct 01 17:04:24 2021

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Picasso Lighting Industries, LLC.



PICASSO LIGHTING INDUSTRIES, LLC
 320 West Commerical Ave., Moonachie, NJ 07074
 201.246.8188

MUS-xR-4-D7-I10-30-80-FW-BW-W
 MUSE - 4' Up/Downlight - White Housing, Frosted White Lens (Downlight), Bat Wing Lens
 (Uplight)
 LED (3000K 80+ CRI)



Image may differ slightly from actual unit.

Summary of Results

Output:

Watts:	59.64 W
Lumens:	7,122.35 lm
Efficiency:	N/A
Efficacy:	117.5 lm/W

Spacing Criterion


Two luminaires, plane 0°	1.24
Two luminaires, plane 90°	1.23
Four luminaires	1.34

Full Beam Angle

0° - 180°	273.05°
90° - 270°	223.91°

Calculated results may not be representative of field performance.
 Ballast factors have not been applied.

Candela Polar Plot

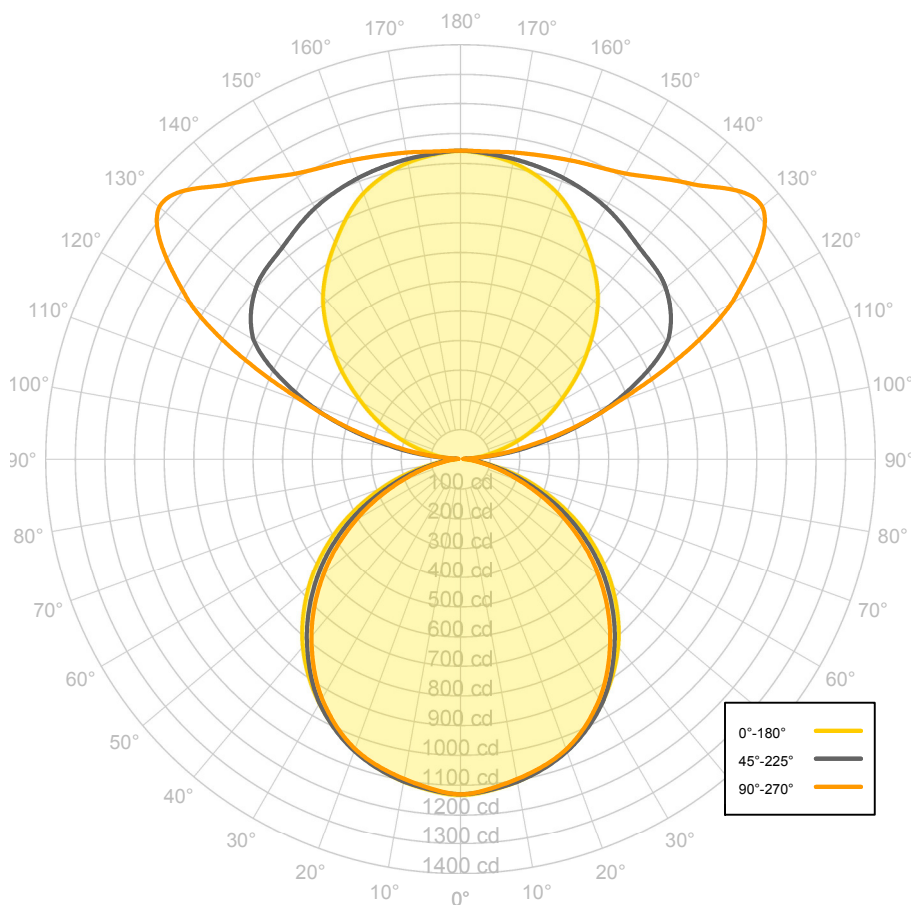

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0° - 10°	191.88	2.69%	90° - 100°	110.51	1.55%
10° - 20°	301.51	4.23%	100° - 110°	344.08	4.83%
20° - 30°	456.16	6.40%	100° - 120°	947.52	13.30%
30° - 40°	544.16	7.64%	120° - 130°	751.17	10.55%
40° - 50°	552.58	7.76%	130° - 140°	721.59	10.13%
50° - 60°	479.02	6.73%	140° - 150°	600.00	8.42%
60° - 70°	334.02	4.69%	150° - 160°	456.35	6.41%
70° - 80°	163.25	2.29%	160° - 170°	287.55	4.04%
80° - 90°	47.27	0.66%	170° - 180°	177.83	2.50%
0° - 90°	3,069.84	43.10%	0° - 180°	7,122.35	100.00%



Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°
0.00°	1,134.38	1,134.38	1,134.38	1,134.38	1,134.38
10.00°	1,105.60	1,104.78	1,108.33	1,104.83	1,099.51
20.00°	1,045.48	1,048.96	1,051.85	1,048.97	1,044.70
30.00°	952.66	953.55	954.99	940.62	937.87
40.00°	828.13	825.16	809.43	790.58	785.67
50.00°	667.24	666.34	638.42	615.63	605.83
60.00°	483.19	475.39	444.04	415.34	404.31
70.00°	281.15	267.43	235.13	212.24	203.92
80.00°	100.10	88.94	70.59	59.32	56.88
90.00°	13.29	18.25	14.94	8.63	7.92
100.00°	91.95	150.48	236.03	229.50	208.87
110.00°	232.80	329.59	549.99	591.38	568.02
120.00°	385.31	496.37	810.69	1,029.16	1,060.39
130.00°	556.61	646.83	903.22	1,211.54	1,328.77
140.00°	721.75	773.08	936.07	1,108.69	1,213.14
150.00°	845.58	873.29	981.37	1,064.73	1,113.70
160.00°	957.30	963.18	1,010.96	1,055.99	1,074.46
170.00°	1,018.03	1,019.41	1,029.43	1,042.84	1,051.56
180.00°	1,042.03	1,042.03	1,042.03	1,042.03	1,042.03

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	9,063	9,063	9,063
45.00°	7,805	4,633	3,931
55.00°	7,168	3,602	2,897
65.00°	6,139	2,430	1,828
75.00°	4,500	1,224	851
85.00°	2,675	402	239



Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

RCR	pfc	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
	pcc	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	0	7,514	7,514	7,514	7,514	6,868	6,868	6,868	6,868	5,662	5,662	5,662	4,559	4,559	4,559	3,546	3,546	3,546	3,070
	1	6,869	6,568	6,299	6,057	6,269	6,016	5,787	5,581	4,981	4,820	4,673	4,030	3,922	3,821	3,154	3,085	3,020	2,613
	2	6,264	5,752	5,328	4,972	5,710	5,275	4,911	4,603	4,380	4,117	3,891	3,555	3,372	3,212	2,791	2,670	2,563	2,210
	3	5,721	5,065	4,557	4,152	5,212	4,651	4,212	3,857	3,873	3,550	3,283	3,153	2,923	2,730	2,484	2,329	2,196	1,887
	4	5,238	4,488	3,939	3,519	4,771	4,128	3,649	3,278	3,448	3,090	2,807	2,816	2,558	2,348	2,229	2,050	1,902	1,631
	5	4,811	4,003	3,438	3,021	4,384	3,687	3,191	2,821	3,090	2,715	2,427	2,533	2,258	2,042	2,014	1,821	1,666	1,426
	6	4,433	3,592	3,028	2,622	4,043	3,314	2,816	2,454	2,787	2,406	2,121	2,294	2,011	1,795	1,833	1,632	1,475	1,261
	7	4,100	3,244	2,688	2,299	3,742	2,997	2,505	2,155	2,529	2,149	1,872	2,091	1,805	1,592	1,679	1,474	1,317	1,126
	8	3,805	2,946	2,405	2,034	3,477	2,727	2,245	1,910	2,309	1,934	1,666	1,917	1,632	1,425	1,548	1,341	1,187	1,015
	9	3,545	2,691	2,168	1,814	3,243	2,494	2,027	1,707	2,120	1,752	1,495	1,766	1,486	1,285	1,433	1,228	1,077	922
10	3,313	2,471	1,966	1,631	3,035	2,294	1,842	1,537	1,956	1,598	1,351	1,636	1,361	1,167	1,334	1,131	985	844	

Cone of Light

Mtg Height	Light Level	0°-180° Beam Diameter	90°-270° Beam Diameter
6 ft	32 fc	0 ft	0 ft
8 ft	18 fc	0 ft	0 ft
10 ft	11 fc	0 ft	0 ft
12 ft	8 fc	0 ft	0 ft
15 ft	5 fc	0 ft	0 ft