

Level 1.4 CF (Remote Driver)

TOOLS & COVE, TASK , OTHERS

TYPE

PROJECT

Overview

- lev-el /?lev(?)/noun noun: level; plural noun: levels. A horizontal plane or line with respect to the distance above or below a given point.
- The Level is an excellent choice of lighting to add a strong angle of light into an industrial, commercial, and residential space. Whether your using a horizontal or vertical cove or you have another architectural element such as a bookcase, the Level is a great tool to illuminate with, if you hide it, or not.
- DESIGNER SELECTIONS
- The Level Series has 1 profile: Level is one and one half inch in width and one half inch in height, and available in several lengths.
- The Level has surface mounting clips and can be installed on grid ceilings as well.
- The Level is always available for your project's special customization needs. Level qualifies as "Made in America" and "American Made", and it is also part of our ECO sustainable end of life program.
- For all: ies files, pictures, instructions, rfa files, and warranties...scroll to bottom.



Level 1.4 CF (Remote Driver)

TOOLS & COVE, TASK , OTHERS

TYPE

PROJECT

Ordering Format

PART NUMBER: LVL-SF

Size	Lumens Indirect	CCT Available	CRI Available	Direct Optics
2 = 2 Feet	I3 = 350 LPF	27 = 2700 Kelvins	80 = 80-85 CRI	DLW = Lambertian White Lens
4 = 4 Feet	I5 = 500 LPF	30 = 3000 Kelvins	90 = 90-95 CRI	DBW60 = Batwing 60 Degree Beam
6 = 6 Feet	I7 = 750 LPF	35 = 3500 Kelvins		D50 = 50 Degree Beam
8 = 8 Feet	I10 = 1000 LPF	40 = 4000 Kelvins		DA4560 = Asymmetric 45 Degree Beam @60 Degree Tilt
CL = Custom Length, add in notes		TW = Tunable White 2700-5000 Kelvins		DA4015 = Asymmetric 40 Degree Beam @15 Degree Tilt
Mounting	Driver / Voltage			
SM = Surface Mount Clips Gyp	RND 1 = Remote Non-Dim Universal 120VAC			
SS = Slot Clip	RND 2 = Remote Non-Dim Universal 277VAC			
ST1 = Flat T-Bar Clip 9/16	RZT 1 = Remote 0-10v dimming 120v dual 1%			
ST2 = Flat T-Bar Clip 15/16	RZT 2 = Remote 0-10v dimming 277v dual 1%			
	RLE1 = Remote Lutron EcoSystem 1% DLC EE CCR / PWM SoftOnFadeToBlack			
	CC = Custom Control - Add in notes			

NOTES

ORDER NUMBER:

Level 1.4 CF (Remote Driver)

TOOLS & COVE, TASK , OTHERS

TYPE

PROJECT

Construction & Mounting

HOUSING

Low profile extruded aluminum housing supports LED printed circuit boards. Mounting clips included. Driver is remote. Lengths are connected by male/female connectors.

REFLECTOR

Integral powder-coated LED housing with excessive reflectivity for increased lumen output

FINISH

Powder-Coated White


OPTICS

Asymmetric lens and Lambertian are used to distribute light.

MOUNTING


Mounting Clips supplied, non adjustable.

Level 1.4 Task

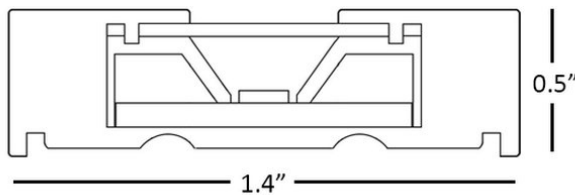

REMOTE DRIVER ENCLOSURE

Size Varies based upon Drivers



Level 1.4 CF (Remote Driver)

TOOLS & COVE, TASK , OTHERS

TYPE

PROJECT

Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming. Please note, 277v has longer distances from power feed to power feed than 120v.
- If required, we can supply premium drivers such as Lutron, Eldoled and others upon request. Advanced control systems compliant drivers such as POE,DALI, DMX, etc. are also available, please consult factory.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- POE - We are working with Molex/Igor POE systems. We can add a POE driver into our fixtures or remote them. Based on the fixture you select, we will notify you (or you can contact the factory) to see if we can install the P-driver or the P-driver needs to be remote. Just add POE1 in the spec and we will advise. Please keep in mind you need to specify a complete POE control system before specifying POE1.
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming.
- Emergency drivers are factory installed as an option, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is minimum of 90 minutes operation to meet code.
- Whip - Six feet long, wiring RHOS/Reach Compliant, 18 gauge, 600v rated, Specify wired to the fixture as an OPTION.

LED Performance

LED Output	CCT Color Temp	Watts	Lumens	Lumens per Watt	CCT Multiplier
Low	3000	3.0 WPF	350 LPF	118 LPW	2700= .95
Medium	3000	4.3 WPF	500 LPF	117 LPW	3000 = 1
High	3000	6.55 WPF	750 LPF	116 LPW	3500 = 1.01
Very High	3000	8.8 WPF	1000 LPF	115 LPW	4000 = 1.03

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim and other special LED colors available.
- Custom Lumens Available
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- If you require a special LED manufacturer, please contact us. LED chip manufacturers used by Picasso are primarily (but not limited to) Nichia, Cree and Samsung.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours

Certifications & Warranties

Level 1.4 CF (Remote Driver)

TOOLS & COVE, TASK , OTHERS

TYPE

PROJECT

- Limited five-year limited warranty on all products that are installed according to the product's specifications. Fixture must be properly installed by qualified licensed electricians, who meet and understand local installation requirements. Proper ambient conditions are to be met. The normal indoor temperatures of 50-90 degrees F, no more than 95% RH and sufficient air flow are required. Fixture should not be modified, and no maintenance or repairs should be performed without the written authorization from Picasso Lighting.
- We manufacture based on approved spec sheets and submittals signed by the customers. Change orders must be in writing and will delay delivery.
- Picasso Lighting reserves the right to repair or replace a defective product with another product with a similar design and the same or better performance, or to refund the distributor for the purchase price. The costs of labor to replace luminaires are not covered.
- Warranty does not cover damage caused by transportation, damage caused by using the fixture in an area it is not UL rated for, damage caused by negligence, lack of maintenance, attempts to repair by unqualified or unauthorized personnel, by using non-original accessories/parts, fixtures installed in systems without power surge protection.
- Picasso Lighting must receive in writing any complaints regarding the defective products, no later than 3 weeks from delivery addressed to: ttoledo@picassoltg.com. Picasso Lighting will send a field technician to the site to evaluate the said defective product or may require product to be sent back to the factory for repair. The customer is responsible for the costs of disassembly and reassembly. We do accept field repairs and replacement labor from licensed electrical contractors but not without a written agreement signed by Picasso Lighting official. Failure to adhere to all warranty and certifications will void any recompense and the warranty.
- IBEW USA Union All fixtures are IBEW manufactured and assembled in the USA. UL listed for dry and damp locations.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.