Individual, Pendant-mounted

PICASSO LIGHTING

INSTALLATION PROCEDURE (Sheet 1 of 4)


DO NOT DISCARD


PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.


Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.


Before Beginning Installation, Locate the Following (4) Components, Gather Required Tools:







To Begin Installation, Locate Feed and Non-Feed Suspension Points:





Plan View

Size	"A"	"B"
12 ft.	12'-0 1/4"	11'-10 1/2"
10 ft.	10'-0 1/4"	9'-10 1/2"
8 ft.	8'-0 1/4"	7'-10 1/2"
6 ft.	6'-0 1/4"	5'-10 1/2"
4 ft.	4'-0 1/4"	3'-10 1/2"


Note: Locate custom fixture suspension points in accordance with approved client drawing.

(Direct & Indirect)





See Sheets 2 and 3 for Step-By-Step Installation Details

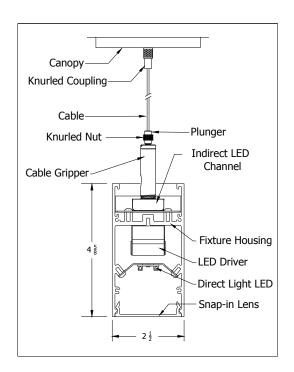


Service Hotline: 1-201-246-8188 Monday through Friday 9:00AM - 5:00PM

Individual, Pendant-mounted


PICASSO LIGHTING


INSTALLATION PROCEDURE (Sheet 2 of 4)


POWER OFF





Stud Into Crossbar


























Fixtures must be installed by licensed electricians in accordance with all local and national codes.


Dia. B


Service Hotline: 1-201-246-8188 Monday through Friday 9:00AM - 5:00PM


Individual, Pendant-mounted


PICASSO LIGHTING


INSTALLATION PROCEDURE (Sheet 3 of 4)
















Completing Feed @ J-Box





POWER OFF


To Complete Feed Suspension: Re-attach knurled coupling to crossbar stud while drawing canopy flush to ceiling. Push Bushing Into Canopy Hole. Secure Power Cord To Cable with Cable Ties.


Neutral Dim + Ground (White) (Purple) Dim (Green) (Grey) Line (Black) Emergency Unswitched (Red) Power Cord @ Fixture (5) or (6) wire

Optional Non-Feed Suspension Methods

Applicable Codes.

POWER OFF






Fixtures must be installed by licensed electricians in accordance with all local and national codes.

Dia. A

Service Hotline: 1-201-246-8188 Monday through Friday 9:00AM - 5:00PM

PICASSO LIGHTING

INSTALLATION PROCEDURE (Sheet 4 of 4)

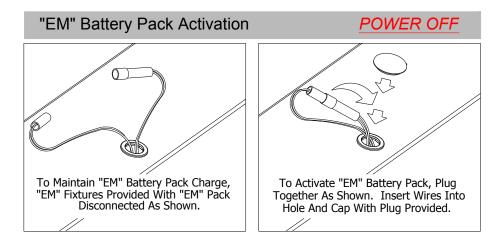

Installation and maintenance of the KAYLA luminaire may only be performed by qualified and licensed electricians in accordance with all applicable codes and standards.

Picasso Lighting Indstries, LLC assumes no responsibility or liability for any unauthorized changes or modifications to the KAYLA luminaire.

The KAYLA luminaire is not intended for outdoor use.

Picasso Lighting Industries, LLC. shall assume no responsibility or liability for the integrity of the mounting surface and structure as well as the integrity of all components not provided by Picasso Lighting Industries, LLC.

Turn off line voltage and allow luminaire to completely cool before performing any maintenance including routine cleaning of luminaire.

Avoid touching LED light emitting surfaces while installing, replacing or providing maintenance to the luminaire.

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%.

Color temperature (k) is subject to a tolerance of +/- 150k from the nominal value.

Any component contained is this luminaire can only be replaced by the manufacturer or an agent thereof.

Keep these INSTALLATION INSTRUCTIONS in a secure and readily accessible place for any future maintenance or for reference.

Service Hotline: 1-201-246-8188 Monday through Friday 9:00AM -5:00PM

DO NOT DISCARD
PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.