


Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE
PROJECT

Overview

- Kayla, kay-luh; a feminine name with Irish, Greek, and Hebrew roots, translating to “slender” and “fair”.
- Kayla Series is a popular luminaire for general up-lighting and down-lighting. Extremely unique when designed in brushed, clear coated aluminum.
- DESIGNER SELECTIONS
- Kayla Series has 1 profile size, four and five eighths’ inches in height, by two inches in width.
- Kayla Series is available in almost any CCT available in the market, we’ve selected the most popular, but don’t let that stop you from asking for something different
- Kayla Series is available in direct light and direct/indirect light. We can also tune in our drivers to specific lumen output, if required.
- Kayla Series is always available for your project’s special customization needs. One example is our Custom Design for the Barclays Center! (view Kayla Flush or Custom Portfolio to see photos)
- Kayla Series qualifies as “Made in America”, “American Made” and is part of our ECO sustainable end of life program
- Our Kayla Series is available in Pendant, Surface, and Wall. With the choice of Flush Lens or Dropped Lens
- For all: ies files, pictures, instructions, rfa files, and warranties....scroll to bottom.

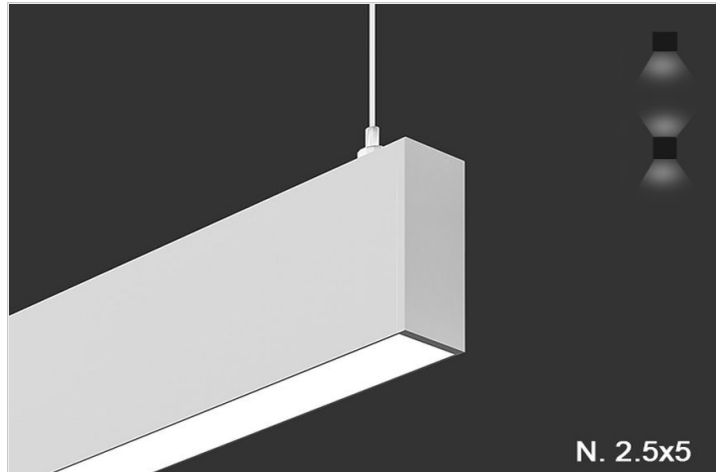

Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE
PROJECT

Ordering Format

PART NUMBER: KAY-PF

Size	Lumens Direct	Lumens Indirect	CCT Available	CRI Available
3 = 3 Feet	D3 = 350 LPF	I3 = 350 LPF	27 = 2700 Kelvins	80 = 80-85 CRI
4 = 4 Feet	D5 = 500 LPF	I5 = 500 LPF	30 = 3000 Kelvins	90 = 90-95 CRI
5 = 5 Feet	D7 = 750 LPF	I7 = 750 LPF	35 = 3500 Kelvins	
6 = 6 Feet	D10 = 1000 LPF	I10 = 1000 LPF	40 = 4000 Kelvins	
8 = 8 Feet	D11 = 1100 LPF	NN = Not Needed	TW = Tunable White 2700-5000 Kelvins	
10 = 10 Feet				
12 = 12 Feet				
CL = Custom Length, add in notes				
SQ = Square, add in notes				
RT = Rectangle, add in notes				
TR = Triangle, add in notes				
Direct Optics	Indirect Optics	Mounting	Driver / Voltage	Fixture Finish
FW = Frosted White	I = Matte Clear ILW = Lambertian White Lens BW = Batwing IBW120 = Batwing 120 Degree Beam IF150 = Flat 150 Degree Beam IA6040 = Asymmetric 60 Degree Beam @40 Degree Tilt IA4560 = Asymmetric 45 Degree Beam @60 Degree Tilt	AC1R = Round 5in Canopy JBox - 5in Support AC1S = Square 5in Canopy JBox - 5in Support ACD1R = Round 5in Canopy JBox - 2in Support Slot Grid ACD1S = Square 5in Canopy JBox - 2in Support Slot Grid ACD2R = Round 5in Canopy JBox - 2in Support T Grid ACD2S = Square 5in Canopy JBox - 2in Support T Grid ACUR = Round 5in Canopy JBox - .5in Support Unistrut ACUS = Square 5in Canopy JBox - .5in Support Unistrut ACRR = Round 5in Canopy JBox - 2in Support 1/4 Rod ACRS = Square 5in Canopy JBox - 2in Support 1/4 Rod	ND 1 = Non-Dim Universal 120VAC ND 2 = Non-Dim Universal 277VAC ZT 1 = 0-10v dimming 120v 1% ZT 2 = 0-10v dimming 277v 1% LE1 = Lutron EcoSystem 1% DLC EE CCR / PWM SoftOnFadeToBlack CC = Custom Controls -add in notes	W = Standard White BK = Standard Black SVR = Standard Silver RAL = Enter RAL # in notes section PA = Plated Aluminum-enter plated finish in notes CW = Standard Wood Finish - see wood PN # enter in notes. SW = Special pattern submitted by designer AA = Anodized Aluminum -enter PN in notes section
Canopy/Power Cord Color	Options			

Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE
PROJECT

CWPW = Canopy White/Power Cord White	AWN = Lutron Athena Wireless Node (RF only)
CWPB = Canopy White/Power Cord Black	AWNS = Lutron Athena Wireless Node (with Sensor)
CBPB = Canopy Black/Power Cord Black	2C = 2 circuit wiring for direct indirect
CBPW = Canopy Black/Power Cord White	IW = Inverter Wiring
	CA = Custom Angle, add in notes
	OS = Occupancy Sensor
	EMD = Emergency Driver - Battery Backup 120-277VAC

NOTES

ORDER NUMBER:

Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Construction & Mounting

HOUSING

Extruded aluminum housings are supplied in nominal lengths of 4 ft., 6 ft., 8 ft. and 12 ft. Fixtures may be continuously rowed (contact factory for details). Internal components are constructed from min. 20 gauge die-formed steel. Easy access to driver and LED boards. End caps are extruded aluminum. Custom sizes are available.

REFLECTOR

Integral powder-coated LED housing with excessive reflectivity for increased lumen output

FINISH

Standard powder-coated colors are white, black and silver. Custom processed wood finishes, aluminum anodized finishes, chrome/gold plating and custom finishes are available as well. We also accept RAL and Pantone numbers for powder-coating color choices.

OPTICS

Direct component provided with an extruded snap-in frosted acrylic lens formulated for LED light sources. Indirect component LED strips are mounted in an extruded aluminum channel with an integral clear acrylic dust cover.

MOUNTING

Cable mounting with various size canopies and power feeds. If not selected in options, canopy color and cord will be white. Cable uses gripper style locking for field adjustments 48" standard. Canopy mounts to standard J-box. Can also be stem mounted. See options for more information.




Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

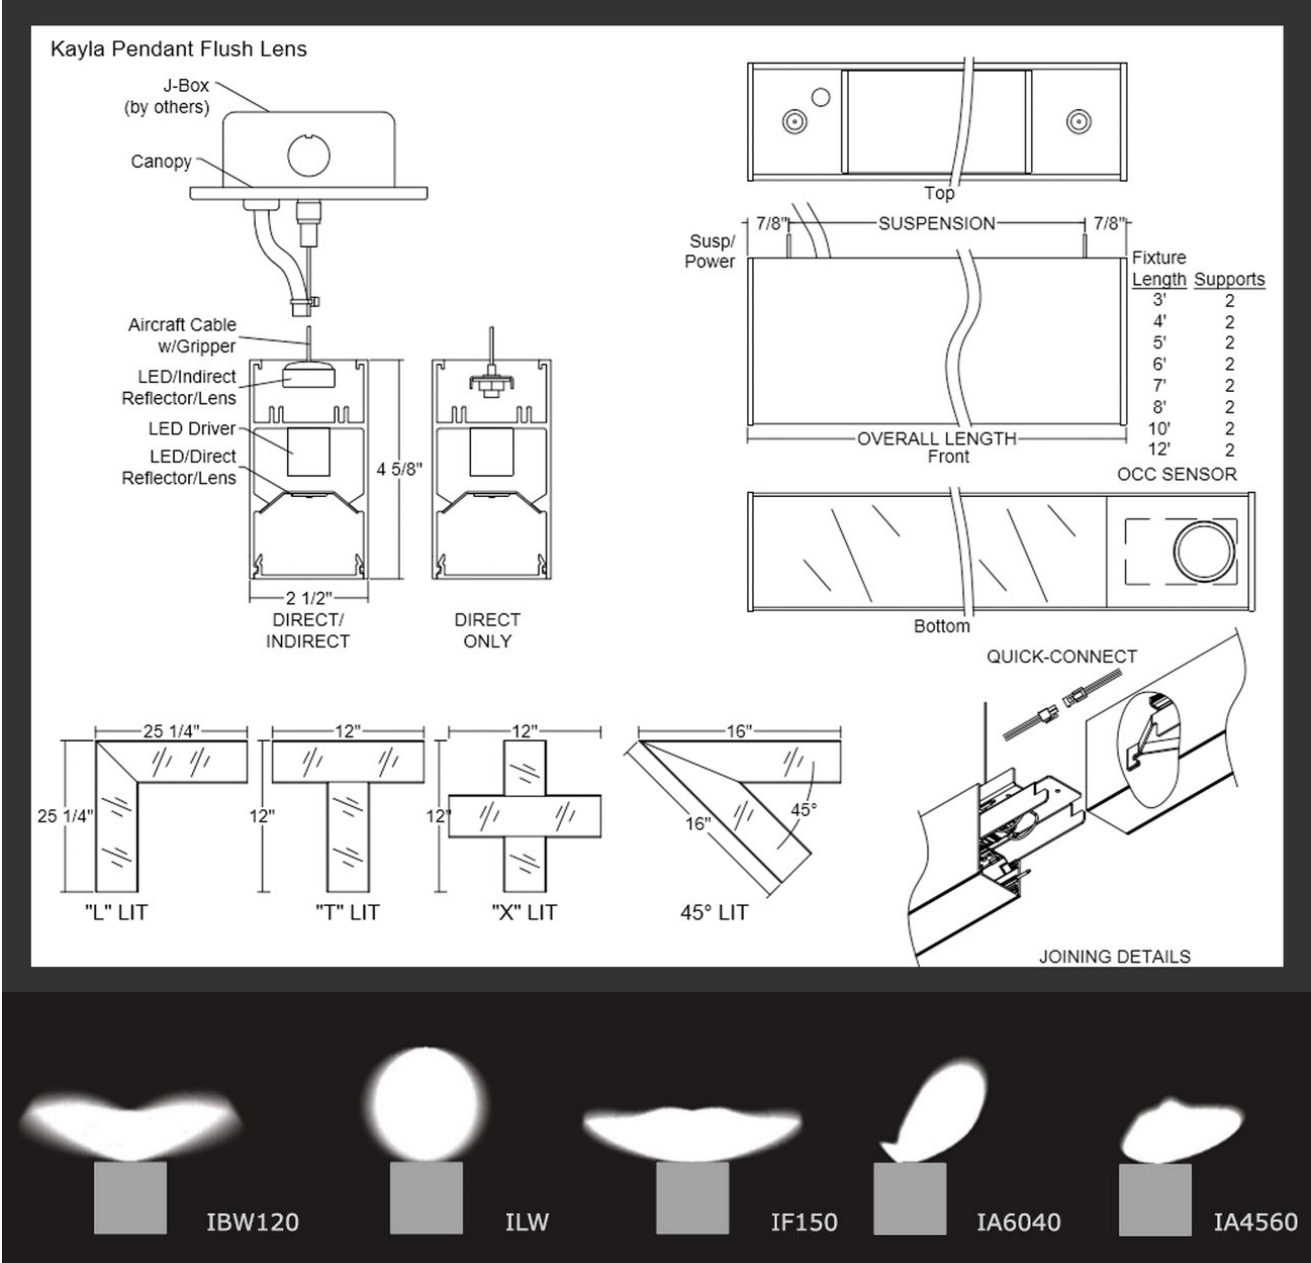

Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE
PROJECT

Standard Finishes

White
W

Black
B

Silver
SVR

Plated Aluminum - Premium Finishes

Antique Brass
PAAB

Polished Chrome
PAPC

Polished Gold
PAPG

Anodized Aluminum - Premium Finishes

xxxx-B for Aluminum to be Brushed

Anodized Black
AABK

Anodized DK. Bronze
AADB

Anodized LT. Bronze
AALB

Anodized Champagne
AALC

Anodized Clear
AACL

Wood - Premium Finishes

LW01

LW02

LW03

LW04

LW07

LW08

DW02

DW07

DW08

DW09

DW10

DW11

DW12

Consult Factory

Custom RAL - Custom finishes go to: tiger-coatings.com Add 8 to Notes

Standard Finishes - colors are powder coated and do not add to delivery lead time.

Anodized Aluminum - can be smooth or brushed, color can vary fixture to fixture and adds 4-5 weeks to lead time. Anodized finish is limited in fixture size.

Plated Aluminum - is a mirror finish in chrome and gold and adds 4-5 weeks to lead time.

Woods Finishes - so realistic, wood finish can add up to 4-5 weeks to lead time.

Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL-recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC, and include 0-10V dimming. Please note, 277v has longer distances from power feed to power feed than 120v.
- If required, we can supply premium drivers such as Lutron, Eldoled, and others upon request. Advanced control systems compliant drivers such as POE, DALI, DMX, etc. are also available, please consult factory.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC, and include 0-10V dimming.
- Emergency drivers are factory installed as an option, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is a minimum of 90 minutes of operation to meet code.
- POE - We are working with Molex/Igor POE systems. We can add a POE driver into our fixtures or remote them. Based on the fixture you select, we will notify you (or you can contact the factory) to see if we can install the P-driver or the P-driver needs to be remote. Just add POE1 in the spec and we will advise. Please keep in mind you need to specify a complete POE control system before specifying POE1.

LED Performance

LED Output	CCT Color Temp	Watts	Lumens	Lumens per Watt	CCT Multiplier
Low	3000	5.23 WPF Direct (4 WPF Indirect)	350 LPF	68	2700 = .95
Medium	3000	7.68 WPF Direct (5.8 WPF Indirect)	500 LPF	66 LPW	3000 = 1/3500=1.01/4000=1.03
High	3000	8.6 WPF Indirect only	750 LPF	82 LPW	4000=1.03
Very High	3000	10 WPF	1100 LPF	110 LPW	x

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to the photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim, and other special LED colors available.
- Custom Lumens Available
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- If you require a special LED manufacturer, please contact us. LED chip manufacturers used by Picasso are primarily (but not limited to) Nichia, Cree and Samsung.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours

Certifications & Warranties

Kayla Flush Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

- Limited five-year limited warranty on all products that are installed according to the product's specifications. Fixture must be properly installed by qualified licensed electricians, who meet and understand local installation requirements. Proper ambient conditions are to be met. The normal indoor temperatures of 50-90 degrees F, no more than 95% RH and sufficient air flow are required. Fixture should not be modified, and no maintenance or repairs should be performed without the written authorization from Picasso Lighting.
- We manufacture based on approved spec sheets and submittals signed by the customers. Change orders must be in writing and will delay delivery.
- Picasso Lighting reserves the right to repair or replace a defective product with another product with a similar design and the same or better performance, or to refund the distributor for the purchase price. The costs of labor to replace luminaires are not covered.
- Warranty does not cover damage caused by transportation, damage caused by using the fixture in an area it is not UL rated for, damage caused by negligence, lack of maintenance, attempts to repair by unqualified or unauthorized personnel, by using non-original accessories/parts, fixtures installed in systems without power surge protection.
- Picasso Lighting must receive in writing any complaints regarding the defective products, no later than 3 weeks from delivery addressed to: ttoledo@picassoltg.com. Picasso Lighting will send a field technician to the site to evaluate the said defective product or may require product to be sent back to the factory for repair. The customer is responsible for the costs of disassembly and reassembly. We do accept field repairs and replacement labor from licensed electrical contractors but not without a written agreement signed by Picasso Lighting official. Failure to adhere to all warranty and certifications will void any recompense and the warranty.
- IBEW USA Union All fixtures are IBEW manufactured and assembled in the USA. UL listed for dry and damp locations.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.